



1

2

3

4

5



Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:12V AC/DC

Contact Resistance: 20m Ohm Max

Insulation Resistance: 100M Ohm. Min.

Withstanding Voltage:250V AC For One Minute

Operating Temperature Range:-40°C To +105°C

Material And Finish:

Insulator:PBT (UL94V-0)

Insulator Color:Black

Contact:Phosphor Bronze Selective Gold Plated


Shell:Brass Tin Plated

How To Order

1211-04/04


Down Position
UP Position

P.C.B Edge

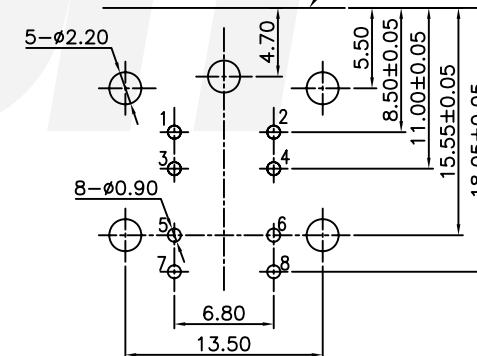

PCB Layout

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE:	 繼德工業股份有限公司 <i>Neltron Industrial Co., Ltd.</i>	
E				Zhou Lin	.X=±0.2 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION: Mini Din Socket Dual Port 4/4P R/A Type	
C				Jeremy Liu	SCALE: 1:1		
B				APPROVAL:	SHEET: 1 / 1	PART NO: 1211-04/04	
A	16-Nov-2007	(PC0079)	Zhou Lin				
REV	DATE	FILE	BY	Mike Wu	PROJECTION: 	SIZE A4	