
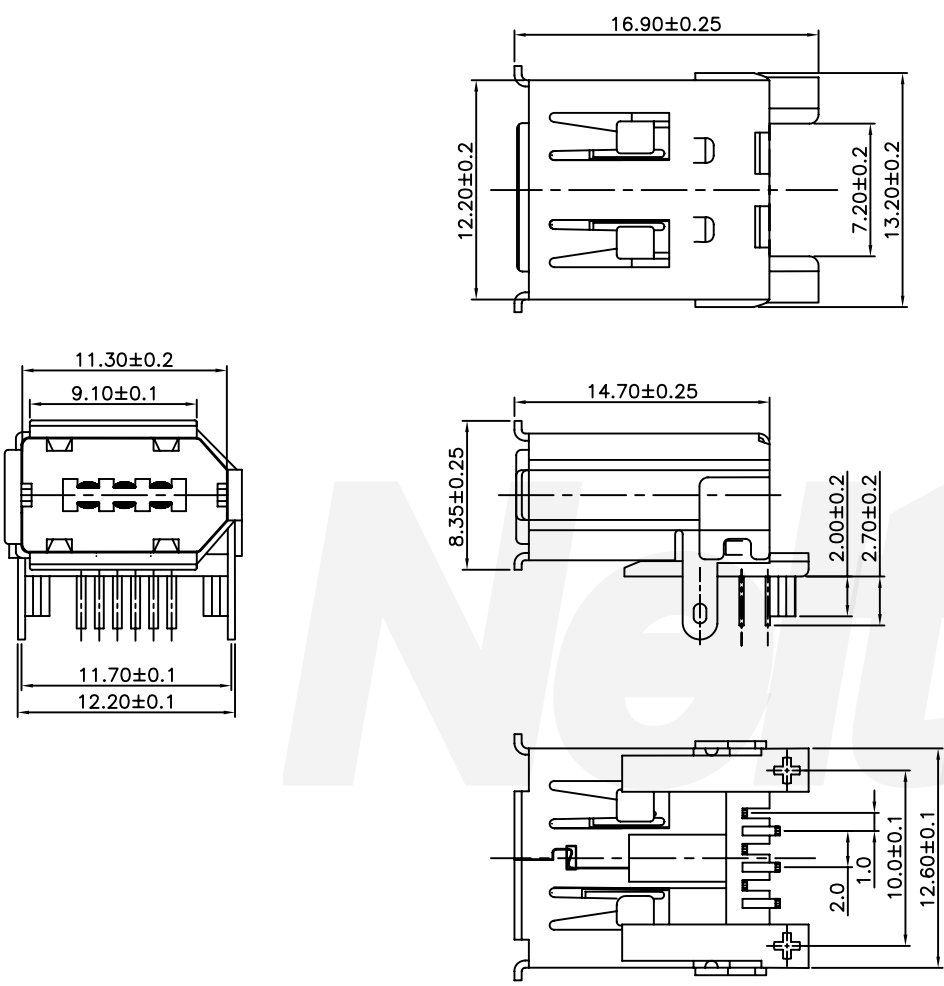


Specifications:
 Current Rating:1.0A AC/DC
 Voltage Rating:30V AC/DC
 Contact Resistance:20m Ohm. Max.
 Insulation Resistance:1000M Ohm. Min.
 Withstanding Voltage:750V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C
 Material And Finish:
 Insulator:High Temp. Plastic(UL94V-2)
 Contact :Copper Alloy
 Contact Plated:Selective Gold Plated
 Shell:Metal Iron with Nickel plated
 How to Order
 1394R-06-F1

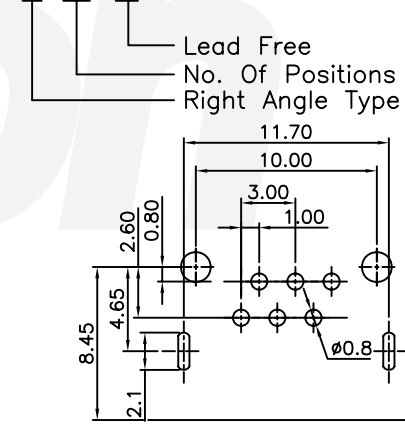

Recommended P.C.B Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION:	SIZE
E				ZYJ	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	IEEE 1394 Female 6P Right Angle Type	PART NO:	A4
C	22-Sep-2006	ECN-CN060909	ZHS	Jeremy Liu	SCALE: 1:1			
B	14-Sep-2006	ECN-CN060905	Mary	APPROVAL:	SHEET: 1 / 1	1394R-06-F1		
A	21-Jun-2006	(PC0199)	ZYJ	Mike Wu	PROJECTION:			
REV	DATE	FILE	BY					