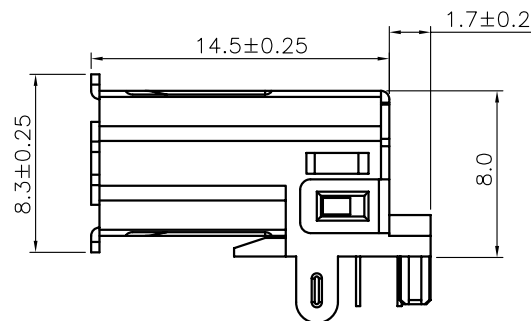
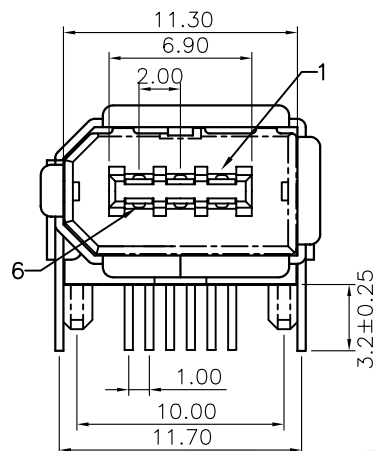



Specifications:

Current Rating:1.0A AC/DC
Voltage Rating:30V AC/DC
Contact Resistance:20m Ohm. Max.
Insulation Resistance:1,000M Ohm. Min.
Withstanding Voltage:750V AC/Minute
Operating Temperature Range:-40°C to +105°C
Materials And Finish:
Insulator:High Temperature Plastic (PBT UL94V-0)
Contact:Copper Alloy
Contact Plated:Selective Gold Plated
Shell:Copper Alloy With Nickel plated

How To Order


1394RR-06-F1

Lead Free
No. Of Positions
Housing Reverse&R/A Type

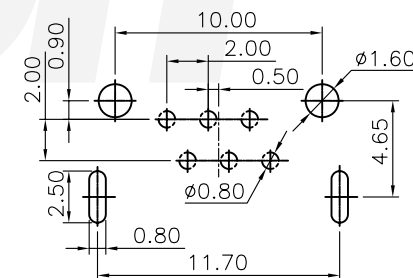

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION:	SIZE
E				Cel King	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	IEEE 1394 6P Female Right Angle Type	PART NO:	A4
C				Jeremy Liu	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	1394RR-06-F1		
A	15-Dec-2006	(PC0052)	Mary	Mike Wu	PROJECTION: 			
REV	DATE	FILE	BY					