
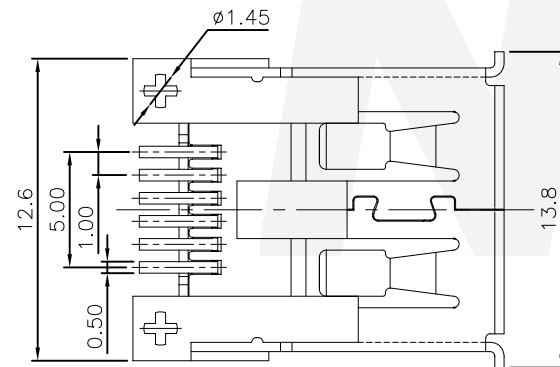
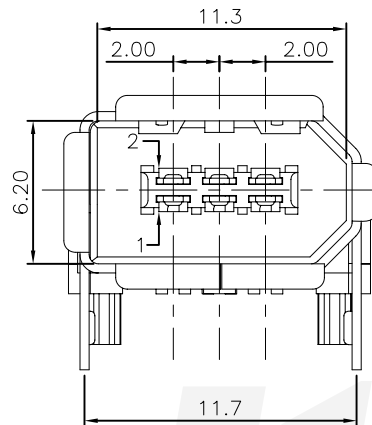
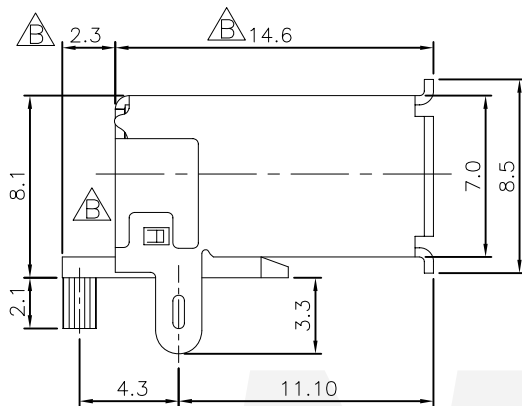


Section A-A

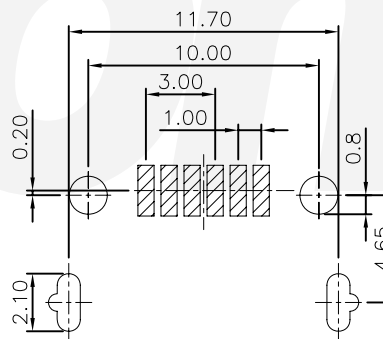

Recommended P.C.B Layout

Specifications:

Current rating:1.0A AC,DC

Voltage rating:30V AC, DC

Contact resistance:20m ohm Max

Insulation resistance:1000M ohm Min

Withstanding voltage:AC 750V AC/minute

Operating Temperature:-40°C ~ +105°C

Materials:

Insulator:High Temperature Plastic UL94V-0

Contact material:Copper Alloy

Contact Plated:Selective Gold Plated

Shell:Metal Iron with Nickel plated

How to Order

1394SM-06-F7

ROHS
No. Of Positions
SMD Type

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION:	SIZE
E				Vincent	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	IEEE 1394 6P Female SMD Type	PART NO:	A4
C				Jeremy Liu	SCALE: 1:1			
B	22-Jan-2008	ECN-CN080128	Zhou Lin	APPROVAL:	SHEET: 1 / 1	1394SM-06-F7		
A	16-Jan-2008	(PC0420)	Vincent	Mike Wu	PROJECTION:			
REV	DATE	FILE	BY					