



1

2

3

4

5

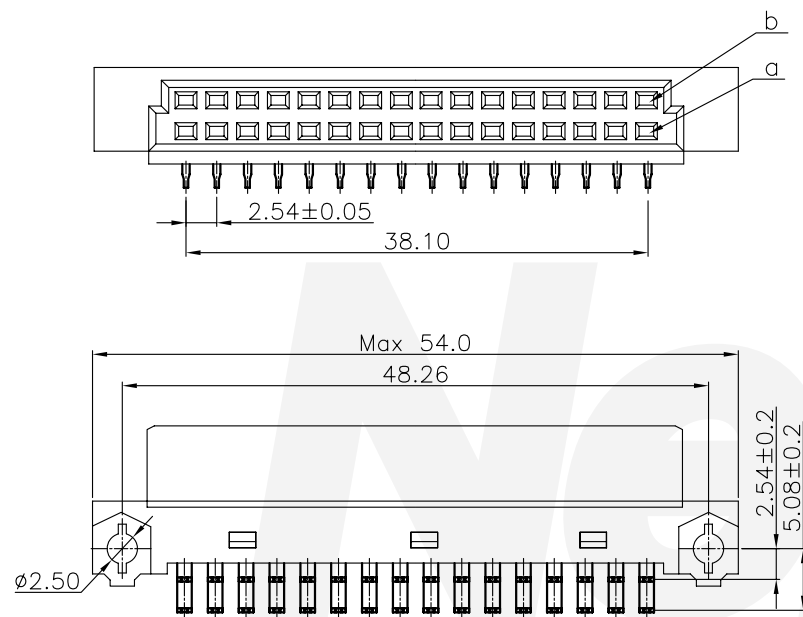

Specification

Current Rating: 2.0A AC/DC

Voltage Rating: 250V AC/DC

Contact Resistance: 30m ohm. Max.

Insulation Resistance: 1000M ohm. Min.

Withstanding Voltage: 1000V AC For One Minute

Operating Temperature Range: -25°C TO $+125^{\circ}\text{C}$

Material and Finish

Insulator: High Temp. Plastic (PBT UL94-0)

Contact: Phosphor Bronze

Plating: Selective Gold Plated

How To Order


41612-32AB-FR-F1

Lead Free

FR: Female R/A Type


AB: Rows With Contacts

No. of Positions

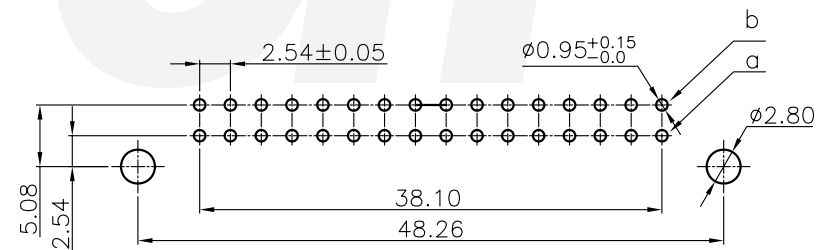

PCB Layout

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE:	 繼德工業股份有限公司 <i>Neltron Industrial Co., Ltd.</i>		DESCRIPTION: 41612 DIN Connectors Female Right Angle Type	SIZE A4
E				Mary	.X=±0.2 .XX=±0.15				
D				CHECKED:	UNIT: MM	PART NO: 41612-32AB-FR-F1			
C				Jerry Liu	SCALE:1/1				
B				APPROVAL:	SHEET: 1 / 1	PROJECTION: 			
A	09-Nov-2006	(PC0026)	Mary	Mike Wu					
REV	DATE	FILE	BY						