
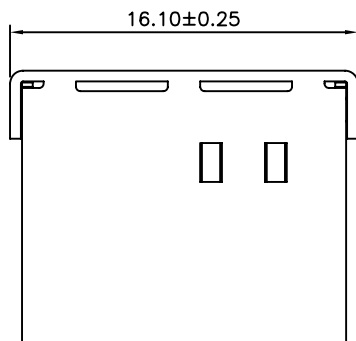

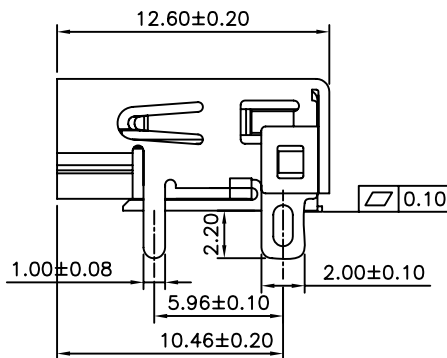


Section:A-A

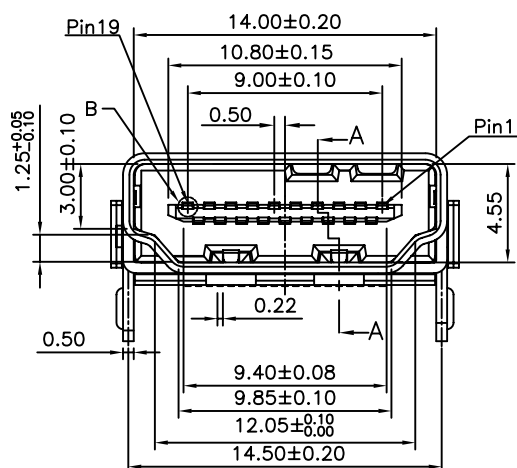

Detail:B
Scale:5:1

Specification:

Current Rating:0.8A AC/DC.

Voltage Rating:40V AC/DC

Contact Resistance:30m ohm. Max.

Insulation Resistance:100M ohm. Min.

Withstanding Voltage:300V AC/minute.

Operating Temperature Range:-25°C~+85°C

Material and Finish

Insulator: High. Temp. plastic(LCP UL94V-0)

Insulator Color:Black.

Contact:Phosphor bronze


Plating:Selective Gold Plated 15u"

Shell:Brass,Tin Plated

How To Order


5090R-19G-SM-F7

RoHS
SMD Type
Gold Plated 15u"
No.of Contacts
Right Angle

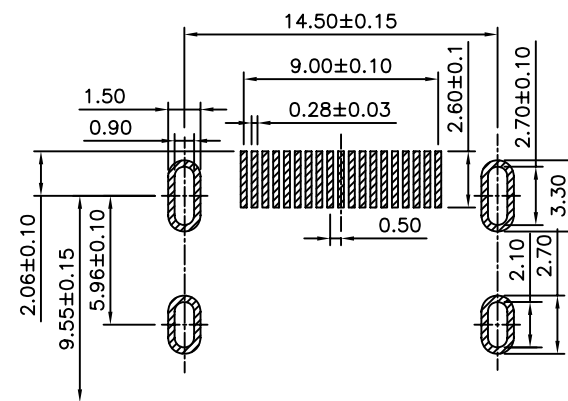

Recommended PCB Layout T=1.6±0.15

RoHS Compliant

F				DRAWN: P.D.J	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	
E							
D				CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: HDMI-19Ways SMT Right Angle Type	SIZE A4
C					SCALE:1:1		
B				APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 5090R-19G-SM-F7	
A	26-Feb-2008	(PC0001)	P.D.J		PROJECTION: 		
REV	DATE	FILE	BY				