




1

2

3

4

5

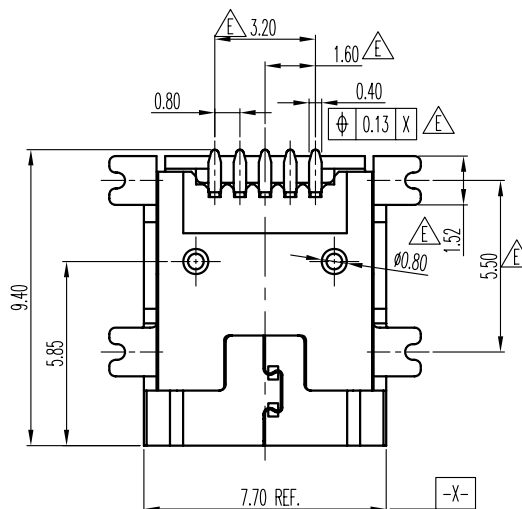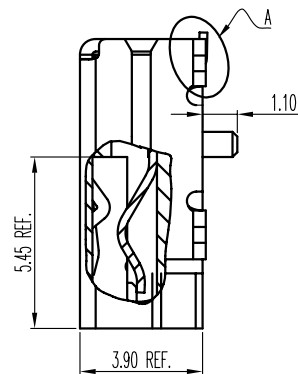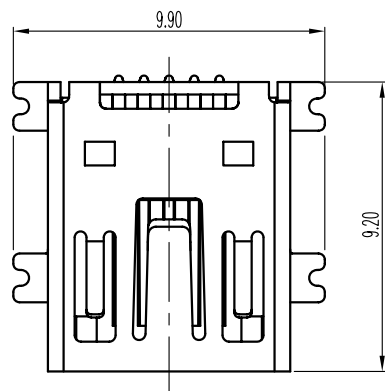

Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:750V AC For One Minute

Operating Temperature Range:-40°C ~ +105°C

Material and Finish

Insulator:High Temp. plastic(LCP UL94V-0)

Insulator Color:Black

Contact:Phosphor Bronze

Contact Plating:Contact Area Gold Plated Over

50u"Nickel Plated And Solder Tail 100u"

Tin Over 50u" Nickel Plated

Shell:Brass With Tin Plated




How To Order

5075ABMR-05-SM

SMD Type

No. Of Positions

Mini AB Type

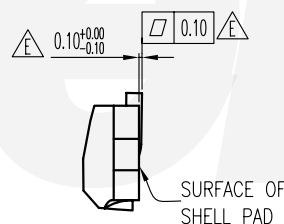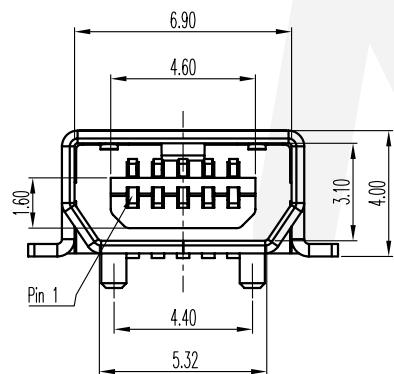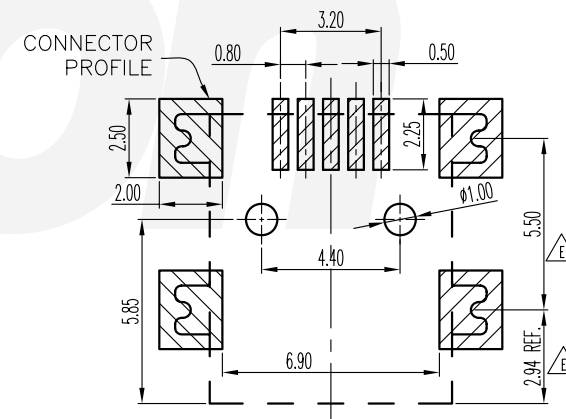DETAIL A
SCALE 2/1

Recommended PCB Layout

RoHS Compliant

DRAWN:
AndrewCHECKED:
Jeremy LiuAPPROVAL:
Mike Wu

GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

UNIT: MM

SCALE:1:1

SHEET: 1 / 1

PROJECTION:

繼德工業股份有限公司
Neltron Industrial Co., Ltd.

DESCRIPTION:

Mini USB Socket 5P AB Type

PART NO:

5075ABMR-05-SM

SIZE

A4

REV	DATE	FILE	BY
E	10-Jul-2007	ECN-CN070715	Andrew
D	28-Sep-2005	(PC0001)	Cel king