

1

2

3

4

5

Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:750V AC For One Minute

Operating Temperature Range:-40°C ~ +105°C

Material and Finish

Insulator: Nylon 6T UL94V-0

Contact:Phosphor Bronze

Plating:Gold Plated on Contact Area,

Tin Plated on Solder Tail.

Shell:Brass,Nickel Plated

How To Order

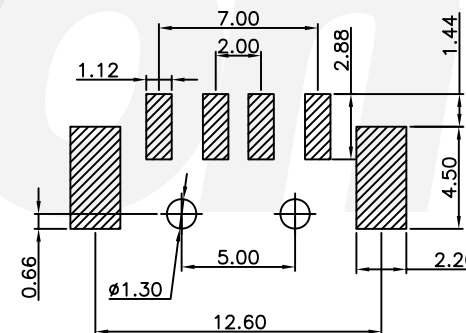
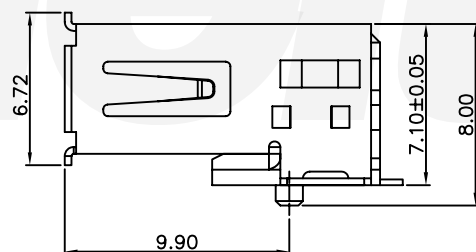
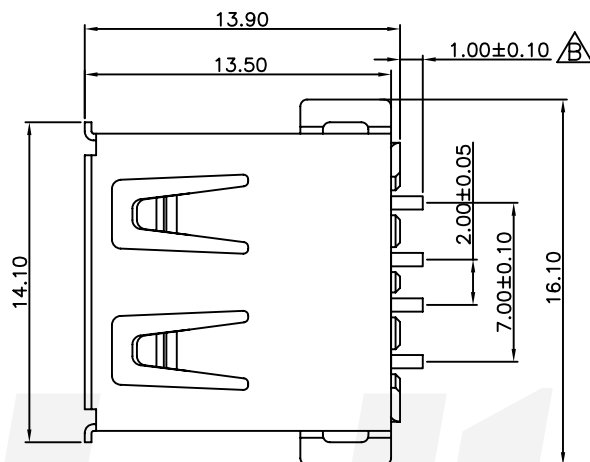
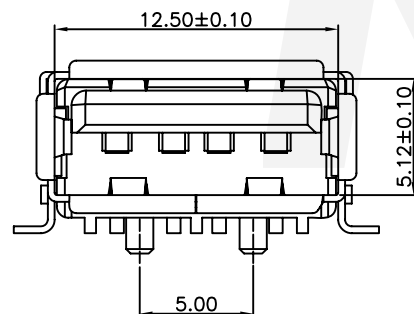

5075AR-04-SM-XX

BK:Black WH:White


SMD Type

No. of contacts

A Type R/A

PCB Layout
(T=1.6±0.10; Ref)

RoHS Compliant

				DRAWN: Leo	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: USB A Type SMD R/A Type Sokcet 4P	SIZE A4
				CHECKED: JEREMY LIU	UNIT: MM SCALE:20:1			
B	18-Feb-2009	ECN-CN090225	zhangxh	APPROVAL: MIKE WU	SHEET: 1 / 1	PART NO: 5075AR-04-SM-XX		
A	21-JUL-2008	(PC0001)	Leo		PROJECTION: 			
REV	DATE	FILE	BY					