

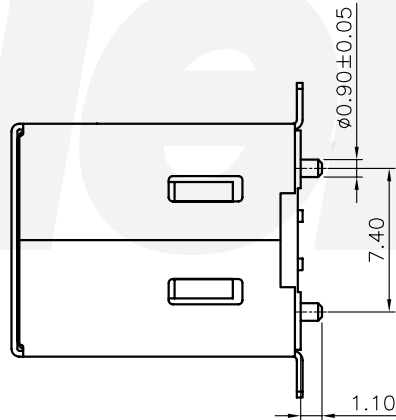
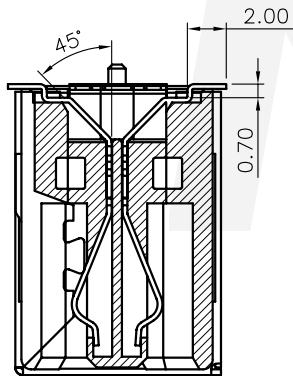

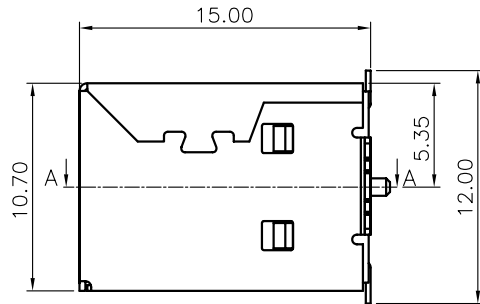


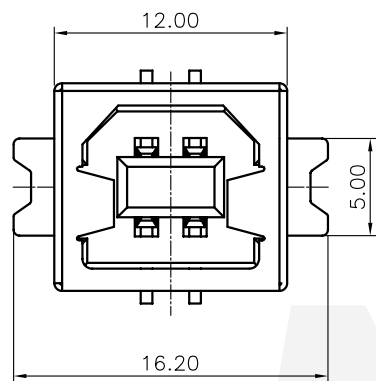

Specifications:
 Current Rating:1.0A AC/DC
 Voltage Rating:30V AC/DC
 Contact Resistance:20m ohm.Max.
 Insulation Resistance:1000M ohm.Min.
 Withstanding Voltage:750V AC/Minute
 Operating Temperature Range:-40°C To +105°C
 Material and Finish:
 Insulator:Nylon6T UL94V-0
 Contact Material:Copper Alloy
 Contact Plating:Selective Gold Plated
 Shell Plating:Brass With Nickel plated
 How To Order
 5075BS-04-SM-XX

BK:Black
 WH:White
 SMD Type
 No Of Contacts
 B Type Straight

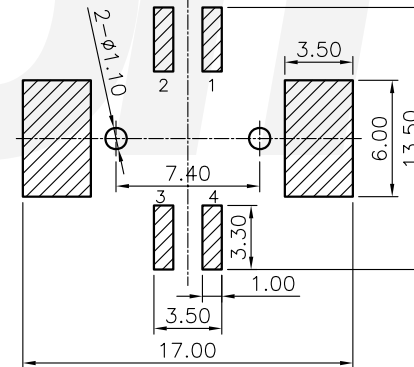

PCB Layout

RoHS Compliant

				DRAWN: Leo	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: USB B Type PCB Female Straight	SIZE A4
				CHECKED: Jeremy Liu	UNIT: MM SCALE:			
				APPROVAL:	SHEET: 1 / 1	PART NO: 5075BS-04-SM		
REV	DATE	FILE	BY	Mike Wu	PROJECTION: 