
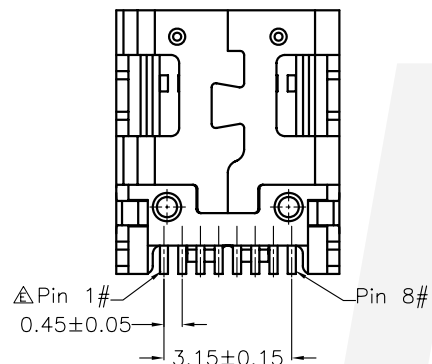
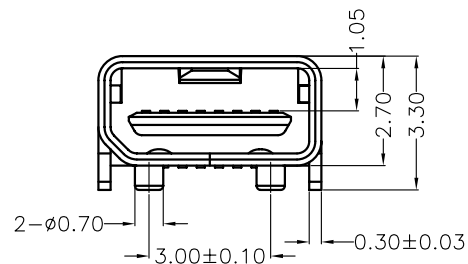


DETAIL A SCALE: 2:1





Specifications:
Current rating:1.0Amps
Voltage rating:30V AC
Contact resistance:50m ohm Max△
Insulation resistance:100M ohm min. △
Dielectric Withstanding:100V AC/Minute△
Operating Temperature:−40°C ~ +105°C
Materials:

Insulator:High Temp. Plastic(LCP UL94V−0)
Insulator Color:Black
Contact:Phosphor Bronze
Plating:Gold Plated on Contact Area;
Tin Plated on Solder Tail.

Shell:Brass,Gold Plated


How To Order
5075MMR−08A

No. Of Positions
Mini USB Right Angle Type

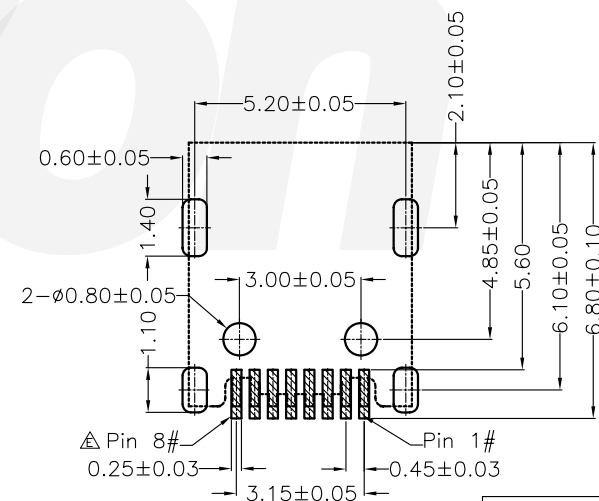

RECOMMENDED PCB LAYOUT

RoHS Compliant

				DRAWN: Leo	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15 .XXX=±0.05	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: 0.45mm Pitch Mini USB 8P SMD Type	SIZE A4
				CHECKED: Jeremy Liu	UNIT: MM SCALE:5:1			
E	01-Dec-2008	ECN-CN081203	zhangxh	APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 5075MMR-08A		
D	01-Nov-2008	ECN-CN081101	zhangxh		PROJECTION: 			
A	20-MAY-2008	(PC0001)	Leo					
REV	DATE	FILE	BY					