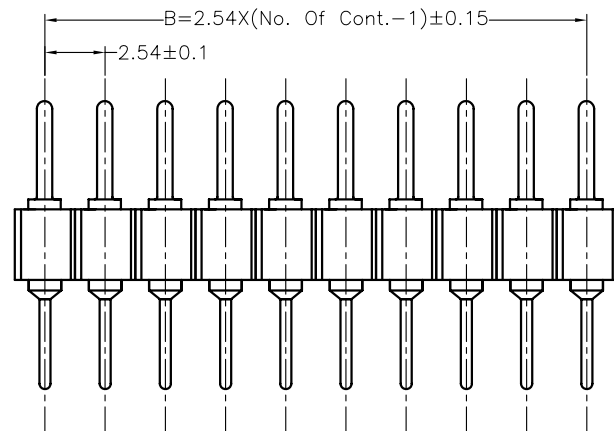
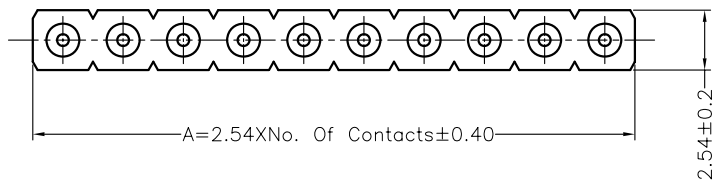


Specifications

Current Rating: 3.0 Amps

Voltage Rating: 100V AC/DC

Contact Resistance: 10m Ohm. Max.

Insulator Resistance: 5,000M Ohm. Min.

Withstanding Voltage: 1,000V AC for One Minute

Operating Temperature Range: -40°C ~ +105°C

Material and Plated

Insulator: High Temp. Plastic (PPS UL94V-0)


Insulator Color: Black

Contact: Brass

Plated: Gold Plated


How To Order

6604P-XXG-121-F6

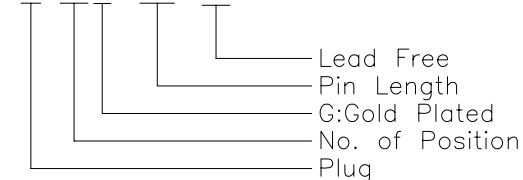

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	5.08	2.54	12	30.48	27.94	22	55.88	53.34	32	81.28	78.74
3	7.62	5.08	13	33.02	30.48	23	58.42	55.88	33	83.82	81.28
4	10.16	7.62	14	35.56	33.02	24	60.96	58.42	34	86.36	83.82
5	12.70	10.16	15	38.10	35.56	25	63.50	60.96	35	88.90	86.36
6	15.24	12.70	16	40.64	38.10	26	66.04	63.50	36	91.44	88.90
7	17.78	15.24	17	43.18	40.64	27	68.58	66.04	37	93.98	91.44
8	20.32	17.78	18	45.72	43.18	28	71.12	68.58	38	96.52	93.98
9	22.86	20.32	19	48.26	45.72	29	73.66	71.12	39	99.06	96.52
10	25.40	22.86	20	50.80	48.26	30	76.20	73.66	40	101.60	99.06
11	27.94	25.40	21	53.34	50.80	31	78.74	76.20			

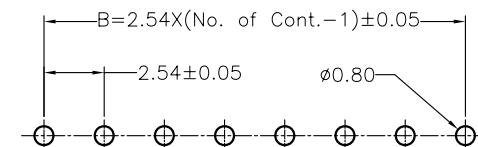

PCB LAYOUT

RoHS Compliant

E				DRAWN:	GENERAL TOLERANCE:	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION:	SIZE
				Mary				
				CHECKED:	X.X=±0.2 X.XX=±0.15			
				Jeremy Liu	UNIT: MM			
D				APPROVAL:	SCALE:	2.54mm Machine Pin Header Single Row	PART NO:	A4
C					SHEET: 1 / 1			
B					PROJECTION:			
A	10-Oct-2006	(PC0001)	Mary	MIKE WU		6604P-XXG-121-F6		
REV	DATE	FILE	BY					