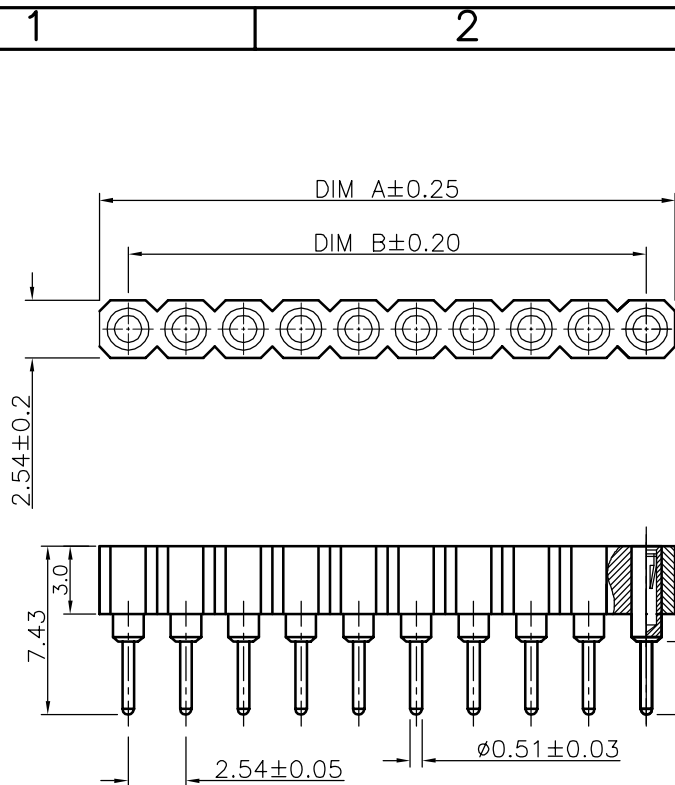


P.C.B Layout

Specifications:
Current rating:1.0A AC,DC
Voltage rating:100V AC,DC
Temperature range:-55°C ~ +240°C
Contact resistance:10mohm max.
Insulation resistance:5,000Mohm min.
Materials:

Insulator:High Temp.Plastic (UL94V-0)
Contact:Beryllium Copper
Plated:Tin Plated

How To Order

6604S-XX-F6

Lead Free
No. of Positions
Socket Single Row

Contacts	DIM A	DIM B	Contacts	DIM A	DIM B	Contacts	DIM A	DIM B
01	2.54	—	15	38.10	35.56	29	73.66	71.12
02	5.08	2.54	16	40.64	38.10	30	76.20	73.66
03	7.62	5.08	17	43.18	40.64	31	78.74	76.20
04	10.16	7.62	18	45.72	43.18	32	81.28	78.74
05	12.70	10.16	19	48.26	45.72	33	83.82	81.28
06	15.24	12.70	20	50.80	48.26	34	86.36	83.82
07	17.78	15.24	21	53.34	50.80	35	88.90	86.36
08	20.32	17.78	22	55.88	53.34	36	91.44	88.90
09	22.86	20.32	23	58.42	55.88	37	93.98	91.44
10	25.40	22.86	24	60.96	58.42	38	96.52	93.98
11	27.94	25.40	25	63.50	60.96	39	99.06	96.52
12	30.48	27.94	26	66.04	63.50	40	101.60	99.06
13	33.02	30.48	27	68.58	66.04			
14	35.56	33.02	28	71.12	68.58			

RoHS Compliant

				DRAWN: Cel king	GENERAL TOLERANCE: .X=±0.25 .XX=±0.20	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.		D
E								
D				CHECKED: Jeremy Liu	UNIT: mm	DESCRIPTION: 2.54mm pitch sip socket Single row	SIZE A4	
C					SCALE:			
B				APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 6604S-XX-F6		
A	18-Oct-2005	(P0430)	Cel king		PROJECTION: 			
REV	DATE	FILE	BY					