

1


2

3

4

5

Mating Pins: 0.63 to 0.90mm

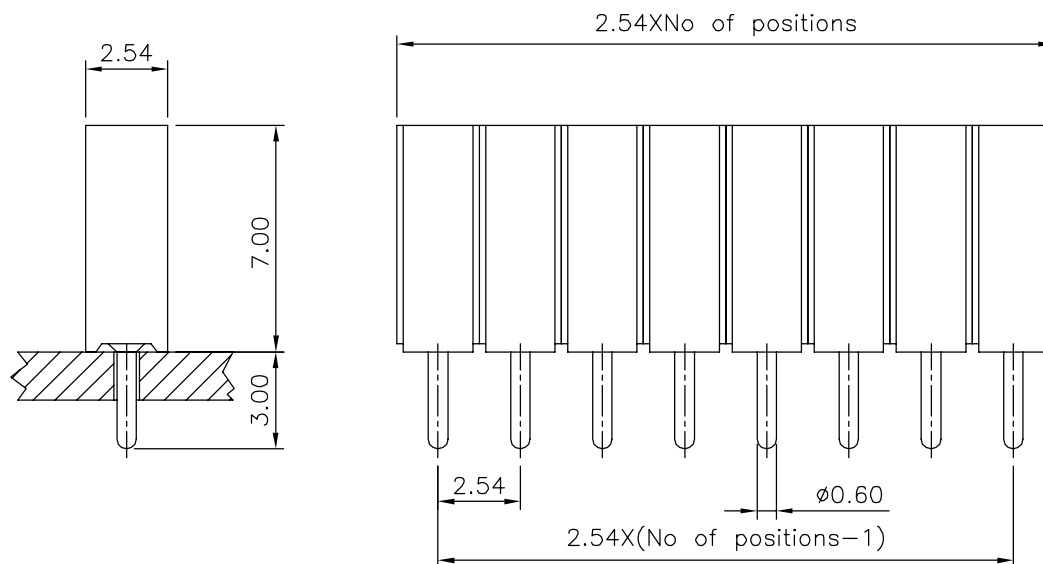

Specifications:

Current Rating:1.0 Amps

Voltage Rating:100V AC/DC

Contact Resistance:10m Ohm Max

Insulator Resistance:5000M Ohm Min

Withstanding Voltage: 1000V AC/minute

Temperture Range:-40°C~+105°C

Material:

Plastic:High Temperature Plastic(UL94V-0)

Contact:Beryllium Copper


Plating: Tin plated

How To Order

6801S-XX-70-F1

Insulatot High:7.0mm

No.Of Position

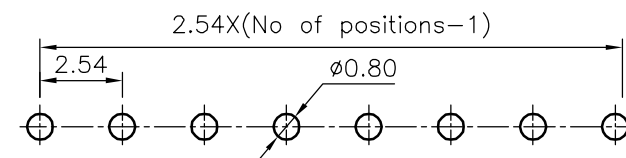

RoHS Compliant

				DRAWN: Cel king	GENERAL TOLERANCE: X.X=±0.2 X.XX=±0.15	繼德工業股份有限公司 <i>Neltron Industrial Co., Ltd.</i>		
E								
D				CHECKED: ANT	UNIT: MM	DESCRIPTION: 2.54mm PCB Socket Straight Type	SIZE A4	
C					SCALE:			
B				APPROVAL: MIKE WU	SHEET: 1 / 1	PART NO: 6801S-XX-70-F1		
A	21-Oct-2005	(PC0001)	Cel king		PROJECTION: 			
REV	DATE	FILE	BY					